


# Onground Tanks

from **Australian Fuelling Systems & Equipment**

## Fuel & Lubrication Equipment and Fluid Handling Specialists

These onground tanks have been designed and built to address current safety and OH&S requirements and are constructed to comply with: AS1692 Tanks for flammable & combustible liquids, AS1940 The storage and handling of flammable & combustible liquids and AS1657 Fixed platforms, walkways, stairways & ladders - design, construction & installation.

A wide range of options are available with custom sizes and configurations made to order.

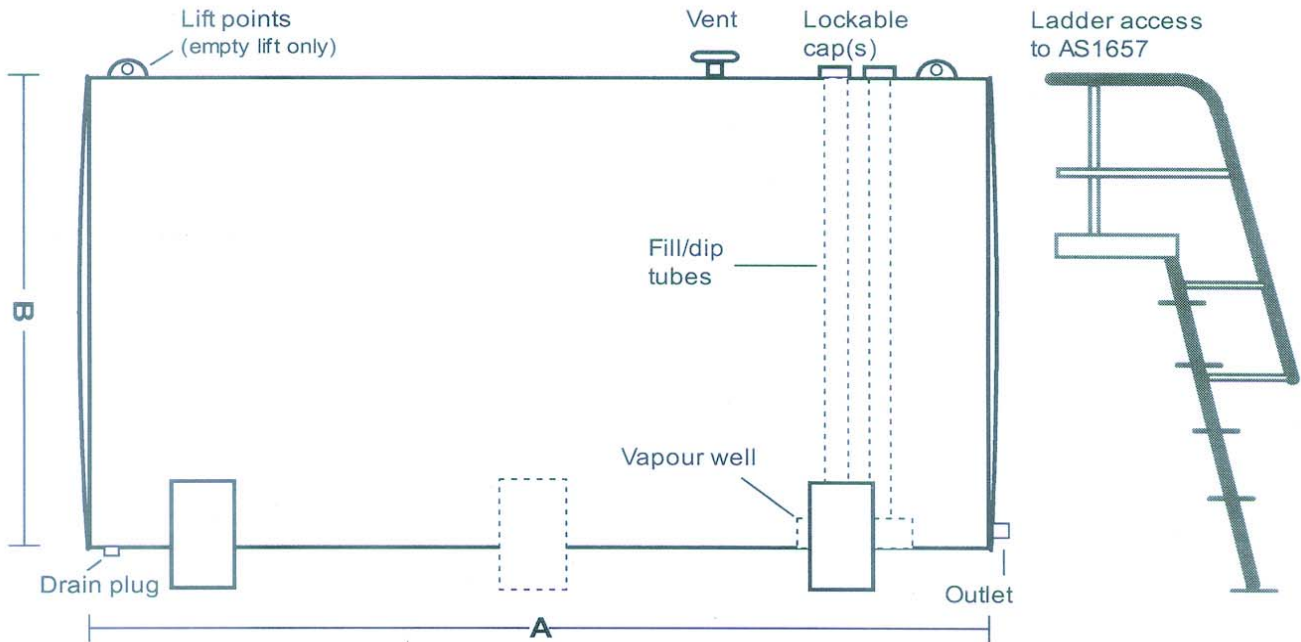

Cat No	Type	Actual Capacity	SFL @ 90%	Dimensions - mm		Material - mm		Mass Kg
				A	B	Body	End	
123003	1	1050	970	1500	950	2	2	90
123091	2	2380	2,142	1800	1300	3	3	300
123050	5	5300	4,770	3000	1500	3	3	500
123055	10	11300	10,170	3000	2190	5	5	1200
123060	15	15800	14,220	4200	2190	5	5	1500
123063	25	27100	24,390	6000	2400	6	6	3400
123065	35	38010	34,209	6400	2750	6	6	3500
123068	50	53450	48,105	9000	2750	6	6	5000
123067	57	57010	51,309	9600	2750	6	6	5300

NB - tank capacities are nominal & vary slightly due to manufacturing processes

### Cradles

Cradles add 200mm to tank height. 3 cradles fitted to 35, 40 and 50K tanks

### Ladders

Ladders compliant to AS1657 are supplied with all tanks.

### Finish

Tanks are etched, treated with best quality primer and finished with 2 coats of epoxy 2 pack paint (white) and fitted with exterior grade red on white product signs on 4 sides

### Custom tanks

Custom tanks including self-bunded, demountable transport, aviation grade, low profile elliptical available on request. From aluminium, stainless and mild steel.

### Options

#### Manhole

500mm diam bolted type.

#### Sight Tube

For diesel only. Fitted with self-closing valve, protective shroud with calibrations.

#### Spill box

Made from 3mm plate with lockable lid. Encloses all top openings into tank.

#### Indirect fill assembly.

50 or 80nb set with Kamlok, dustcap, ballvalve and swing check valve and piping to fill tube.

#### Top mounted suction

Fitted with anti-siphon valve and 40mm piping to lower front of tank for connection to PD pump.

#### Pumpsets

Tanks can be supplied with pumpsets to your specification.

[www.fuelequipment.com](http://www.fuelequipment.com)

See & purchase all you need in fuel equipment

Our web site offers full details and up-to-date prices on a huge range of fuel and liquid handling equipment with secure online purchasing facilities.

**Compare our prices before you buy!**

Australian  
**FUELLING**  
Systems & Equipment



**Australian Fuelling Systems & Equipment**

PO Box 7162 NEMSC - 7-11 Armstrong Street, Tamworth NSW 2340

Ph 1800-025 869 Fax 1800-654 732 Email sales@fuelequipment.com