


Fuel/Lube Service Truck

from **Australian Fuelling Systems & Equipment**

Fuel & Lubrication Equipment and Fluid Handling Specialists

Lube/Refuelling vehicle

Vehicle constructed for refuelling and onsite topping up of lubricants & coolants and greasing. Fitted with hydraulic crane for loading 180kg grease drum and 205 litre lubricant drum. High volume hydraulically driven air compressor supplies power to all pumps.

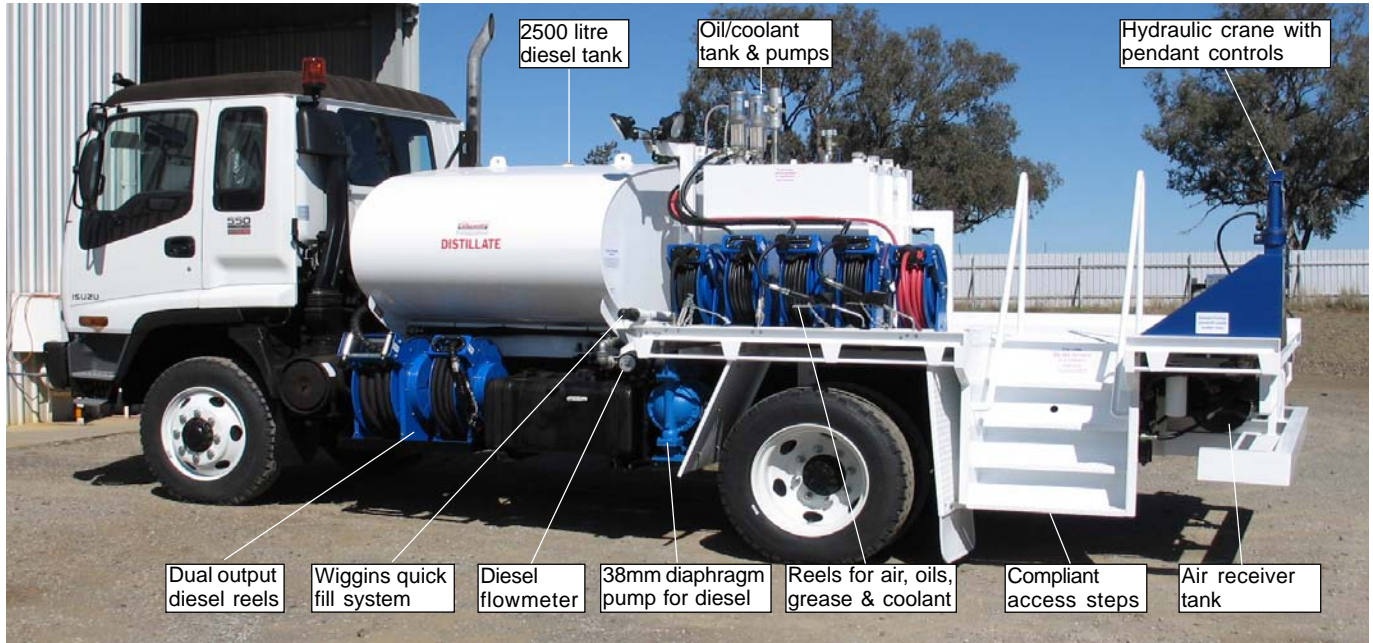

www.fuelequipment.com

See & purchase all you need in fuel equipment

Our web site offers full details and up-to-date prices on a huge range of fuel and liquid handling equipment with secure online purchasing facilities.

Compare our prices before you buy!

Australian
FUELLING
Systems & Equipment



Australian Fuelling Systems & Equipment

PO Box 7162 NEMSC - 7-11 Armstrong Street, Tamworth NSW 2340

Ph 1800-025 869 Fax 1800-654 732 Email sales@fuelequipment.com

Diesel refuelling system

The vehicle is equipped with 2 x hoses reels giving 2 flow rates for different applications. One reel is equipped with 15m x 38mm delivery hose with a Wiggins automatic shutoff nozzle & swivel. This system delivers 250 lpm direct to mine equipment fitted with Wiggins quickfill equipment. The other reel delivers 75 lpm through a 25mm automatic nozzle - this is used for standard vehicles, trucks & 4WD's etc.



Wiggins nozzle secured in holster



Diesel is dispensed by 38mm air-operated diaphragm pump and measured through 38mm Macnaught flow-



Tank is steel elliptical with gross capacity of 2700 litres. Attached directly to the chassis rails by spring-loaded brackets. Tank is bottom filled by Wiggins quickfill and is fitted with Hydra-Flo low pressure shutoff system which provides positive overfill protection without pressurising the tank.



Oils & Coolant System

Vehicle is fitted with reels for air, grease, coolant and 2 x grades of oil. A multi-compartment tank gives 250 litres capacity for each fluid. A grease system with 180kg drum and 55:1 Lincoln pump provides high pressure supply to the dispensing reel. All reels have 20m reach. Oil reels are equipped with digital end-of-hose metering valves.



Multi-compartment tank with sight tubes, lockable fill caps. Oil tanks have filtered vents.

Oil pumps are 5:1 ratio, coolant pump is 3:1 stainless steel.

Shows the dispensing hose reel with control valves secured in full-width spill tray.

Vehicle systems & equipment



Shows two positions for 205 litre drums - 1 x for grease and 1 x for lubricant.



Basic handwash station with cleaner & water

Air compressor



Huge 55 cfm tri-cylindar cast iron air compressor with hydraulic drive powers the onboard pumps and supplies air power for other tasks as required.



Air receiver tank

Hydraulic crane

Hydraulic crane with pendant control allows easy loading of lubricant & grease drums onto the vehicle.



Heavy duty steel bumper protects rear of vehicle

Australian
FUELLING
Systems & Equipment

Australian Fuelling Systems & Equipment
PO Box 7162 NEMSC - 7-11 Armstrong Street, Tamworth NSW 2340
Ph 1800-025 869 Fax 1800-654 732 Email sales@fuelequipment.com

